

Fig. 1

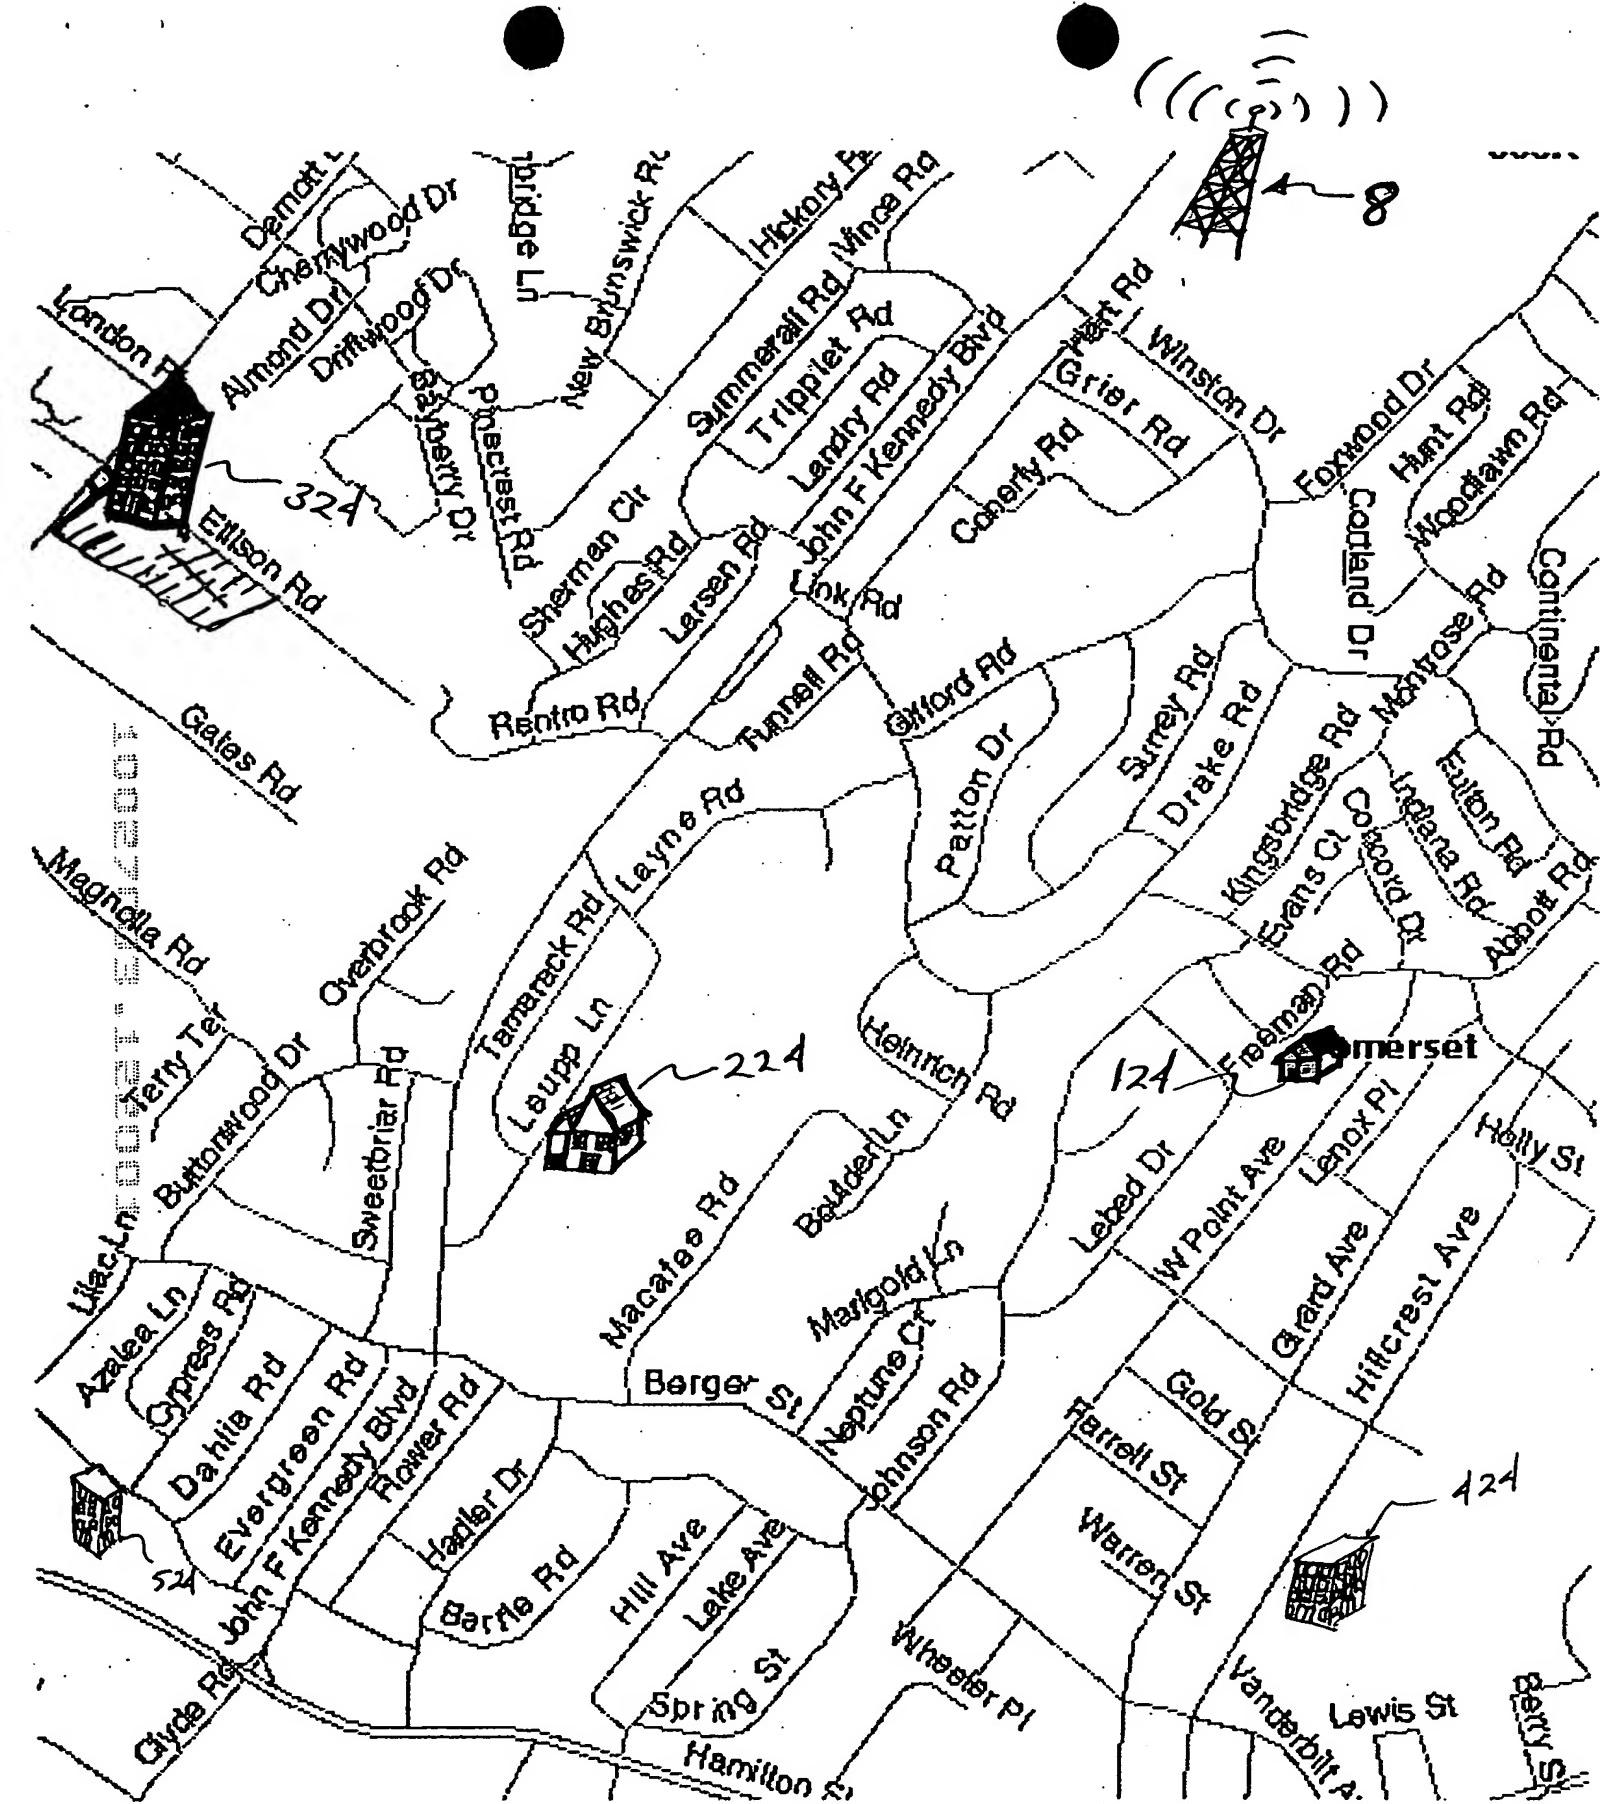


Fig. 2

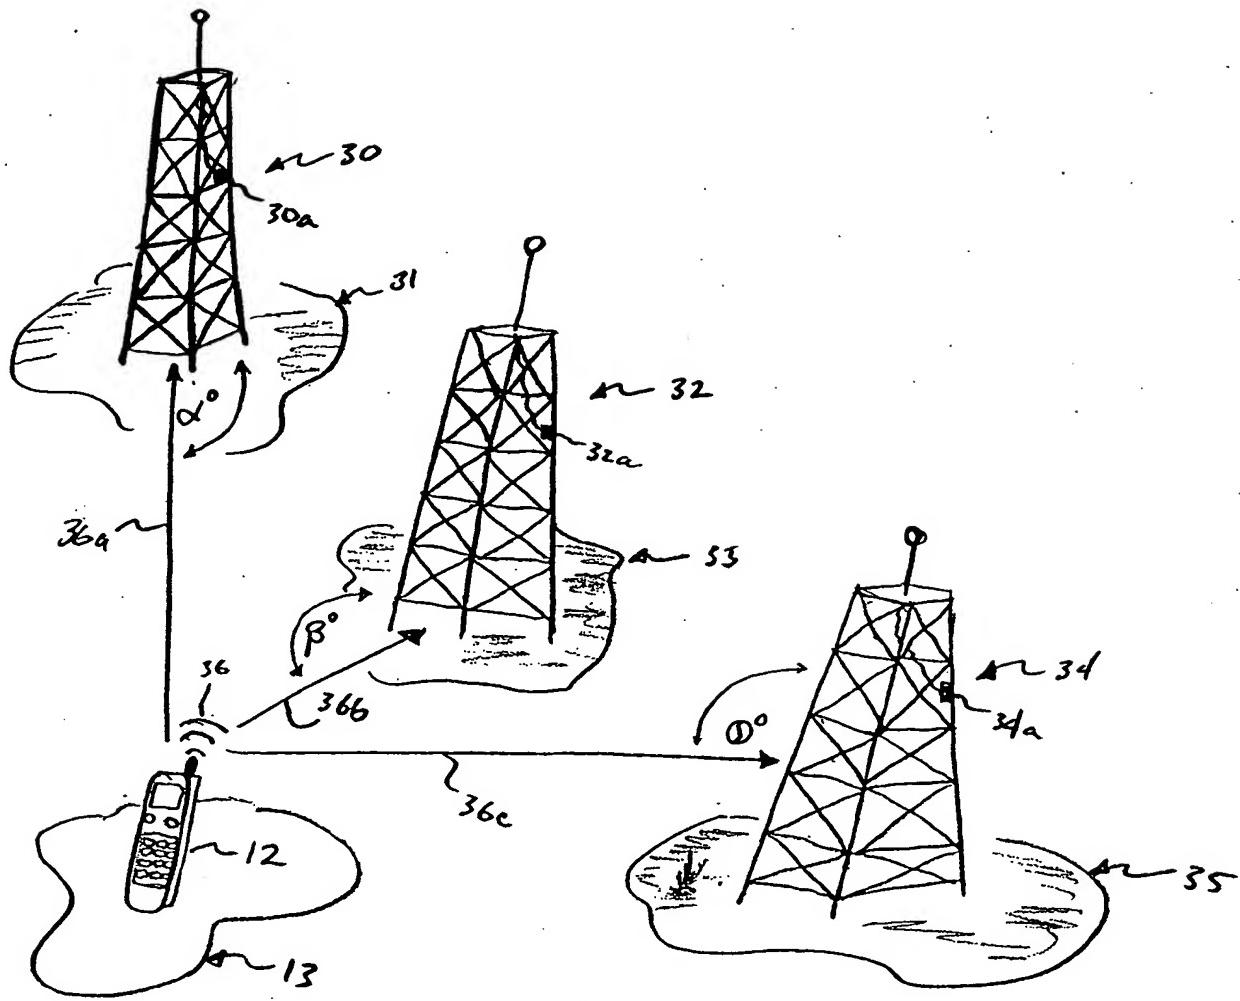


Fig. 3

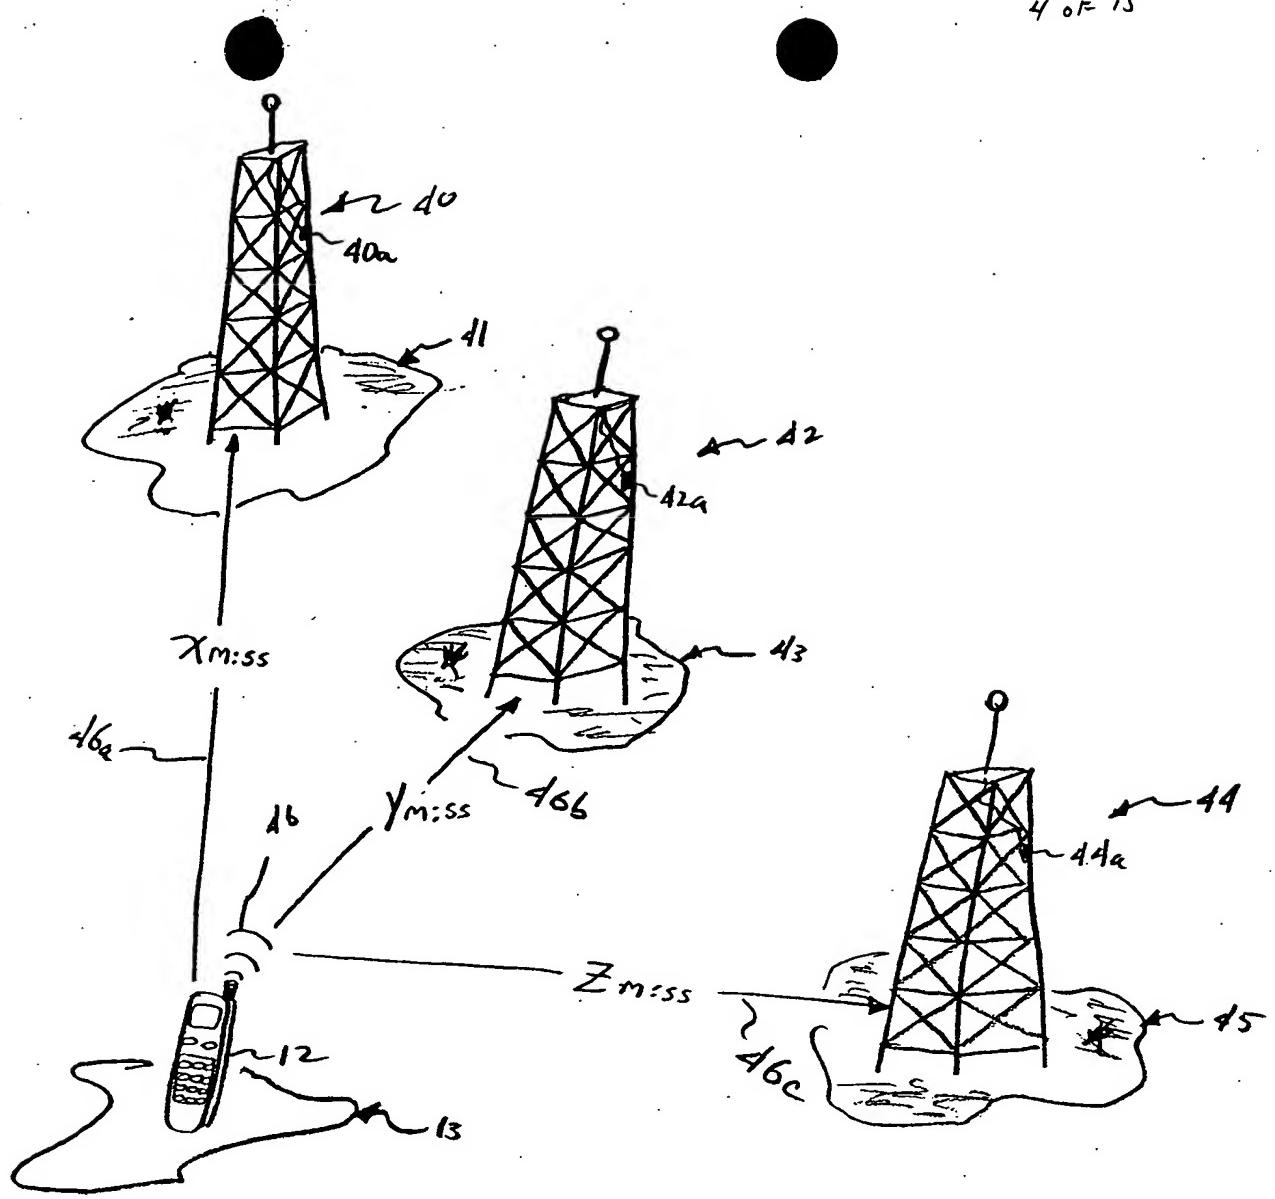


Fig. 4

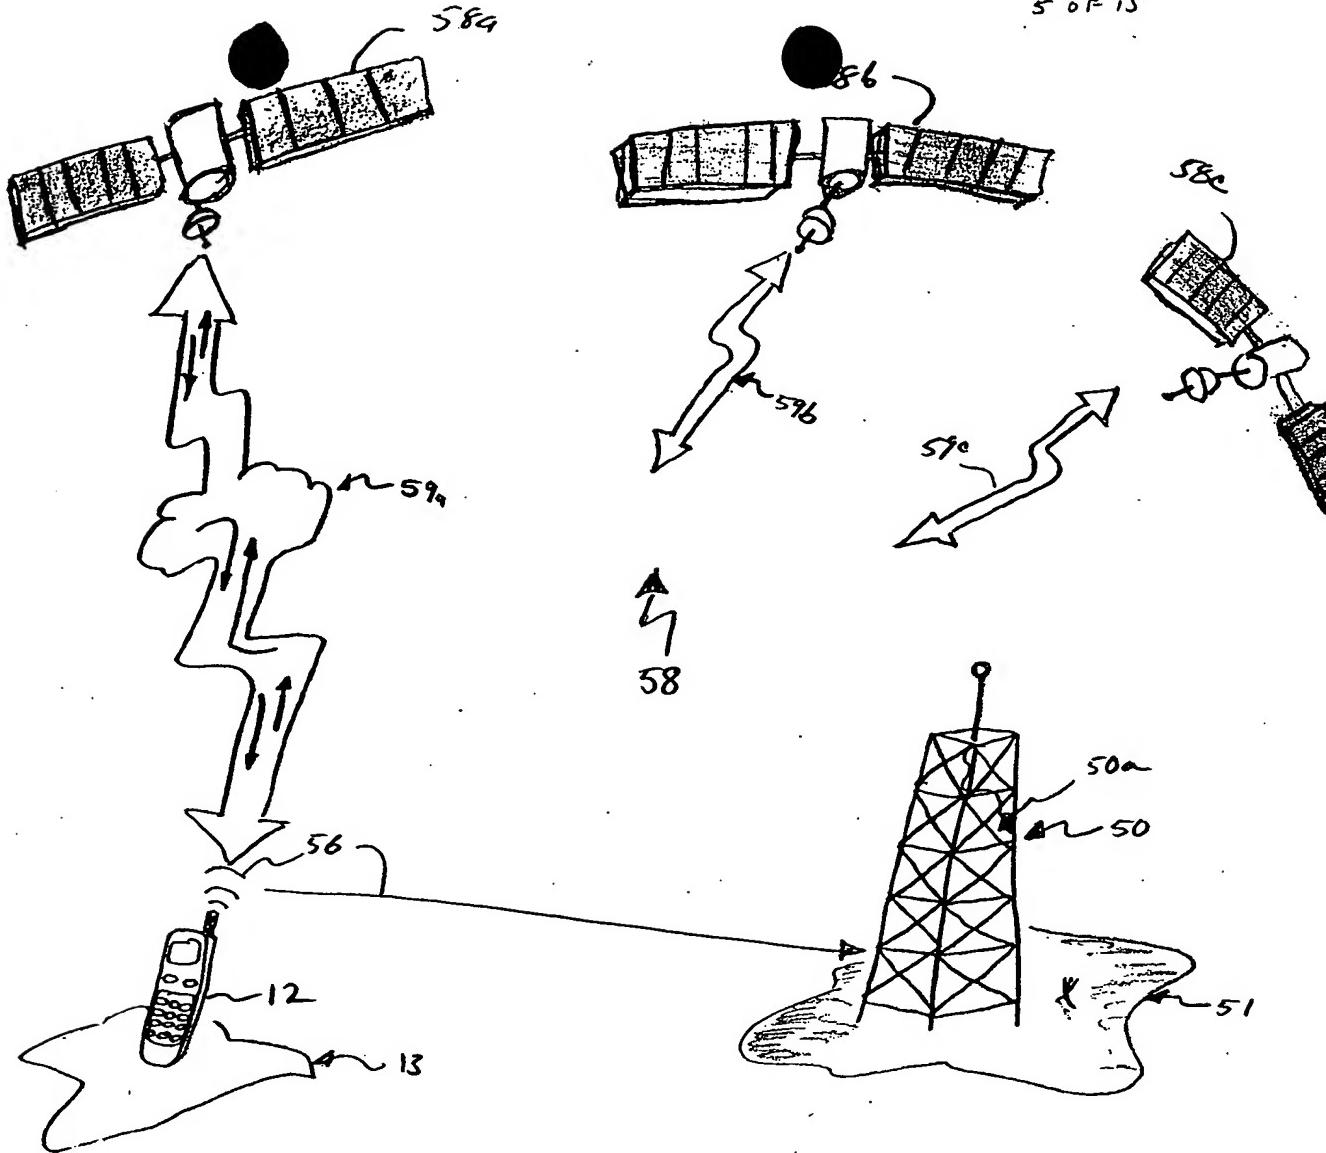


Fig. 5

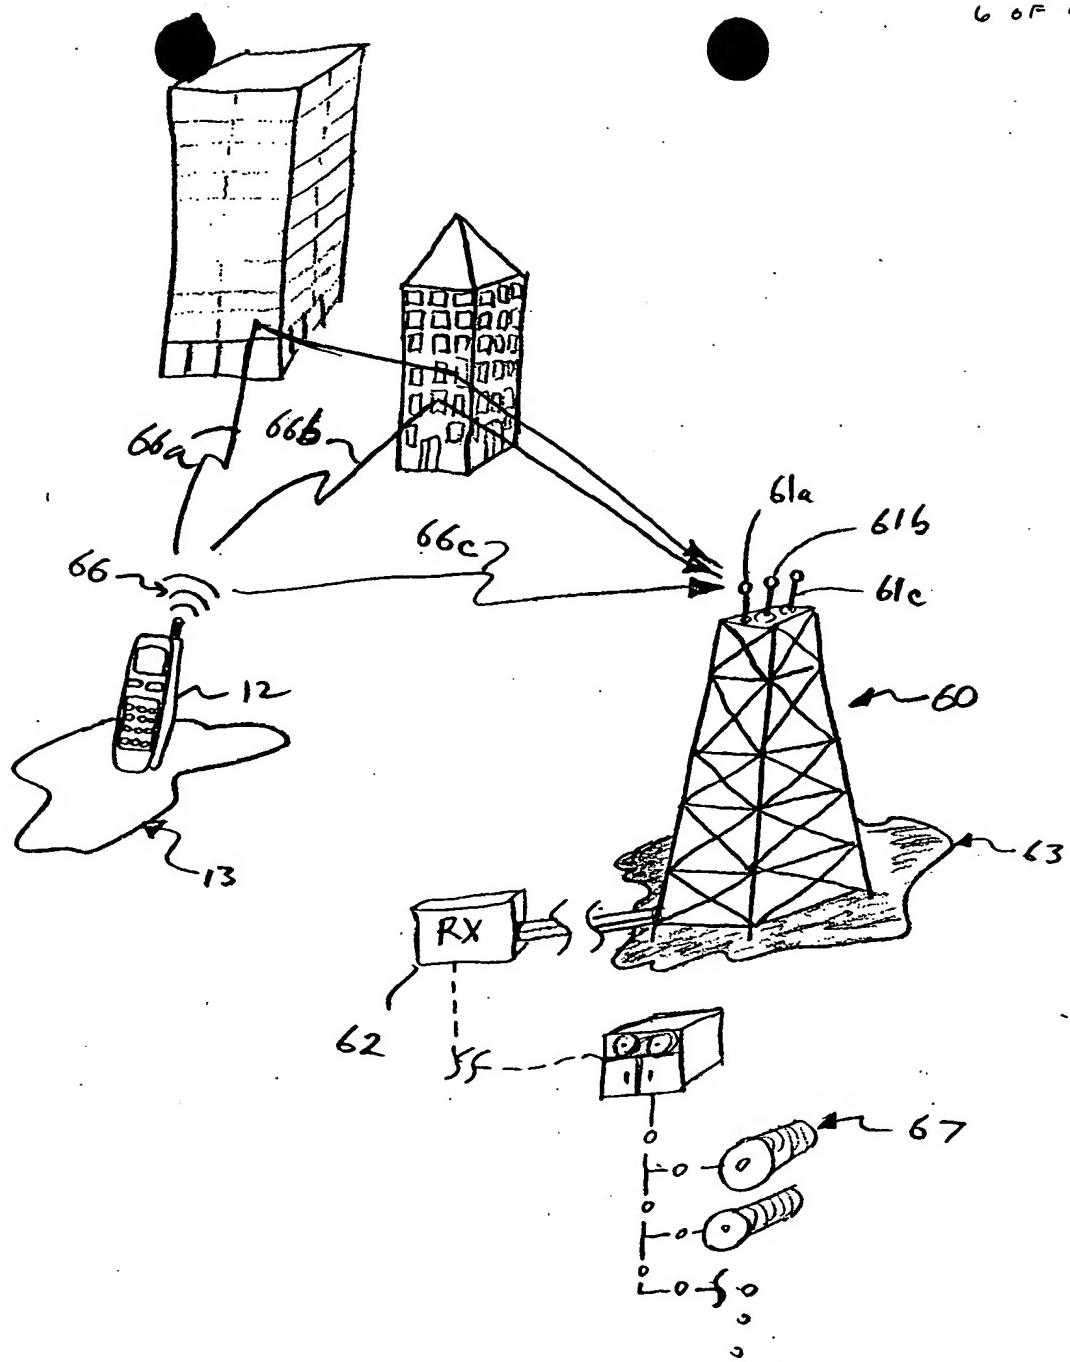


Fig. 6

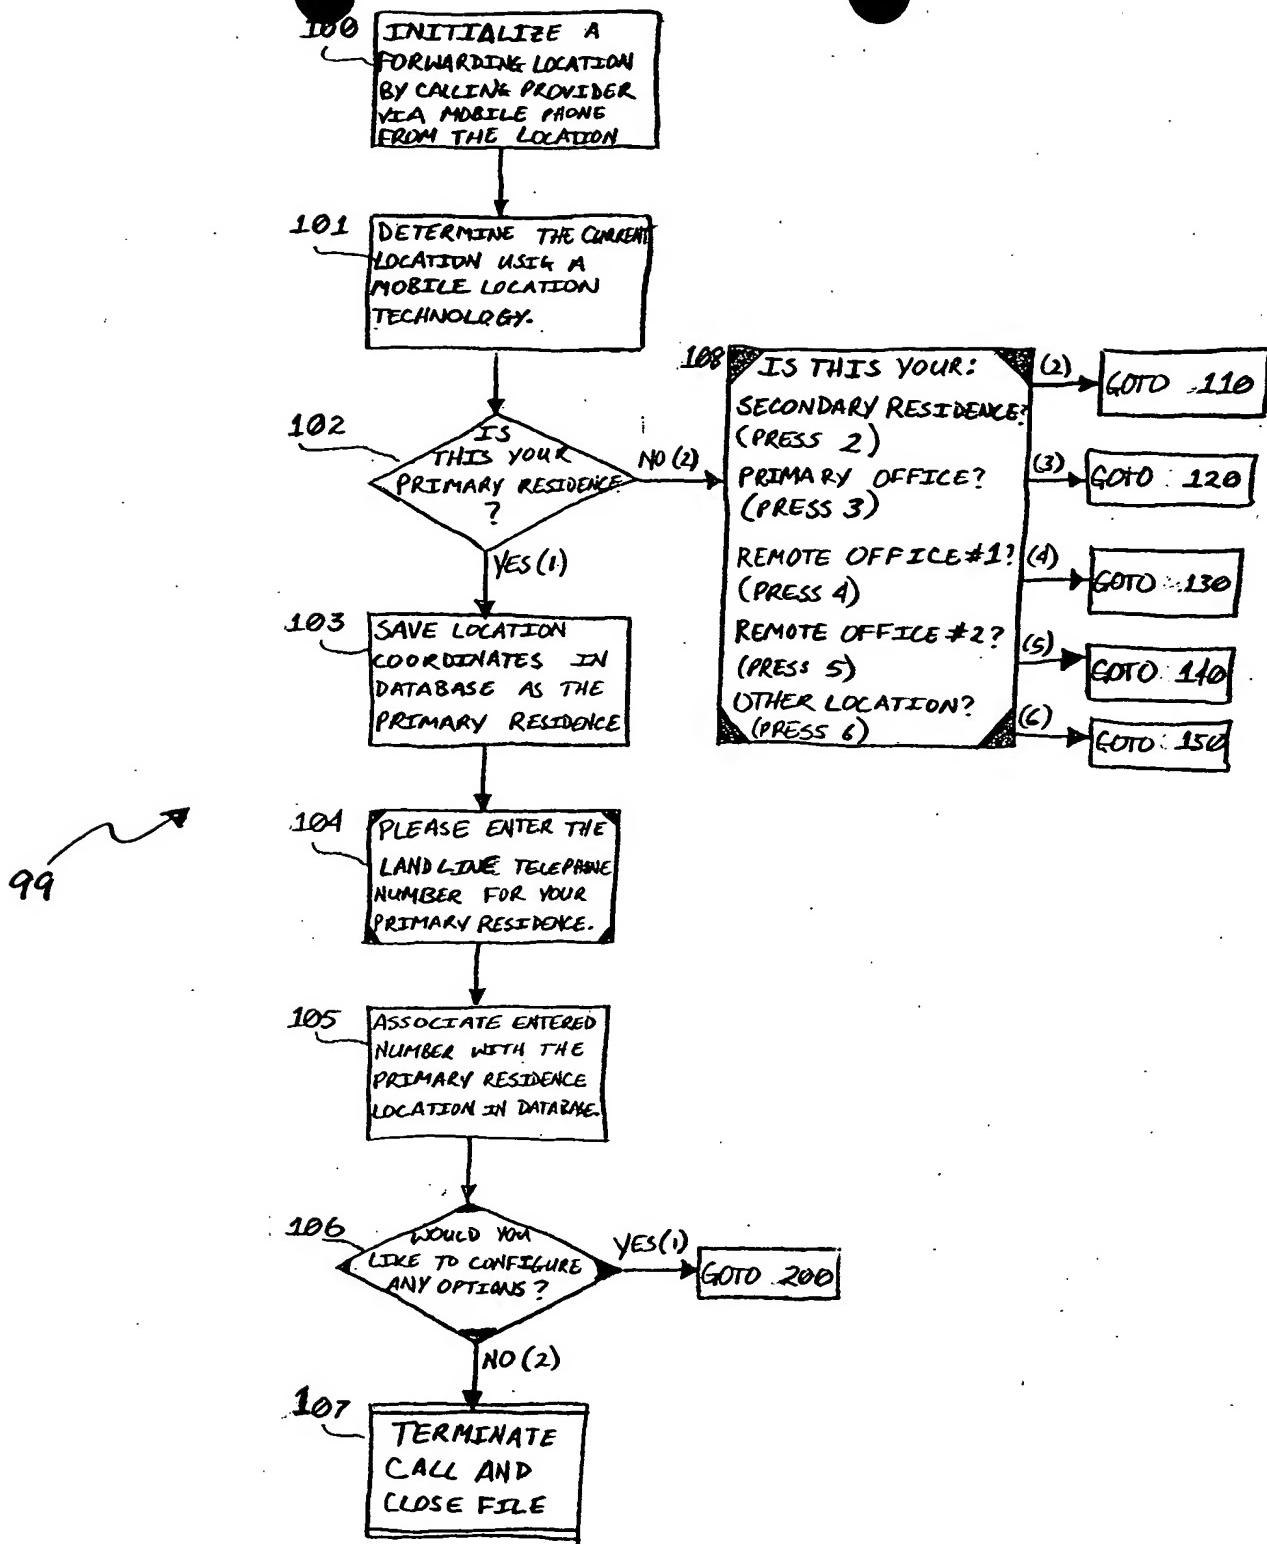


Fig. 7

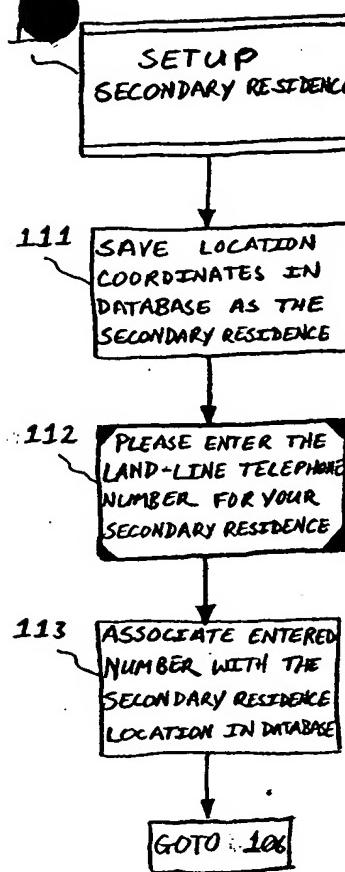


Fig. 8

100-2000-0681-126004

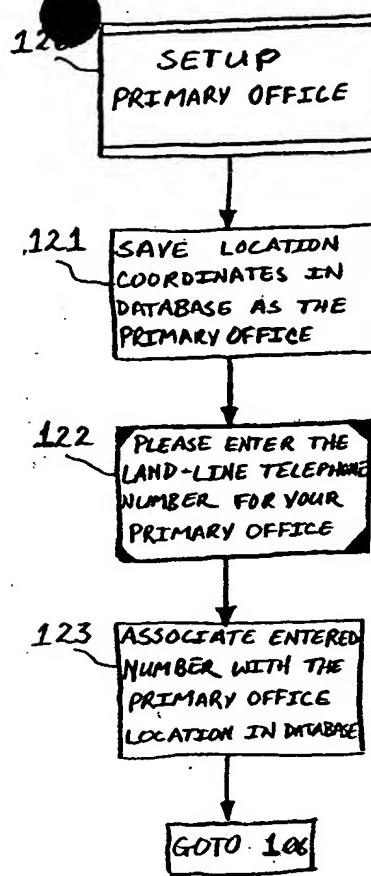


Fig. 9

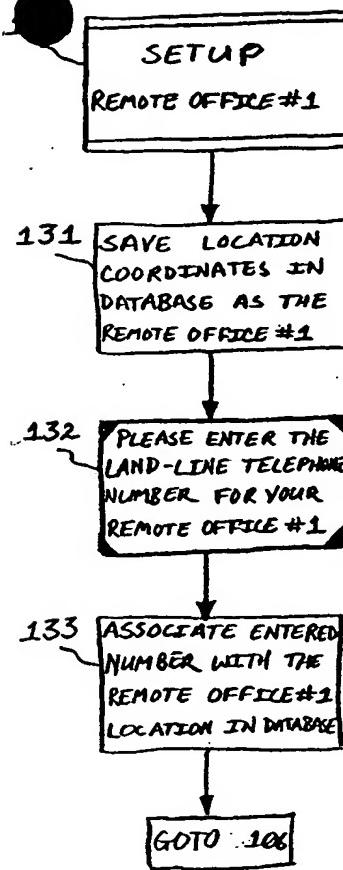


Fig. 10

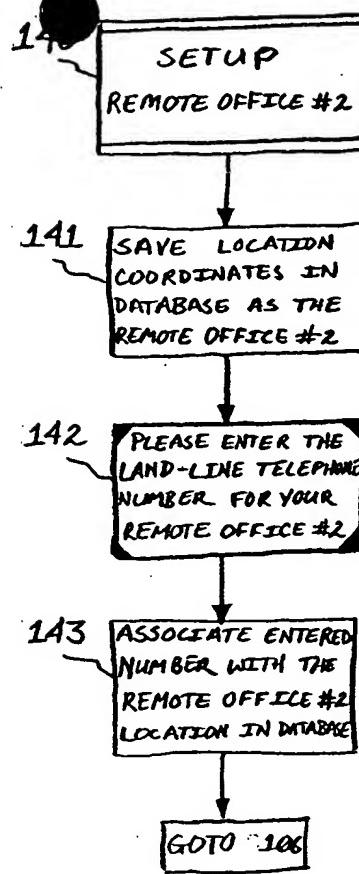


Fig. 11

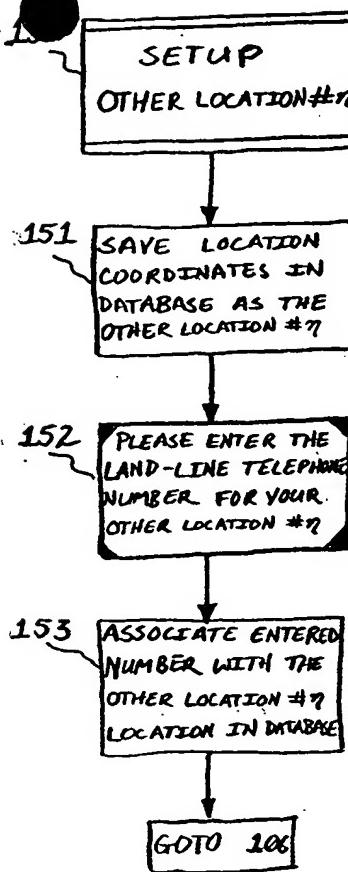


Fig. 12

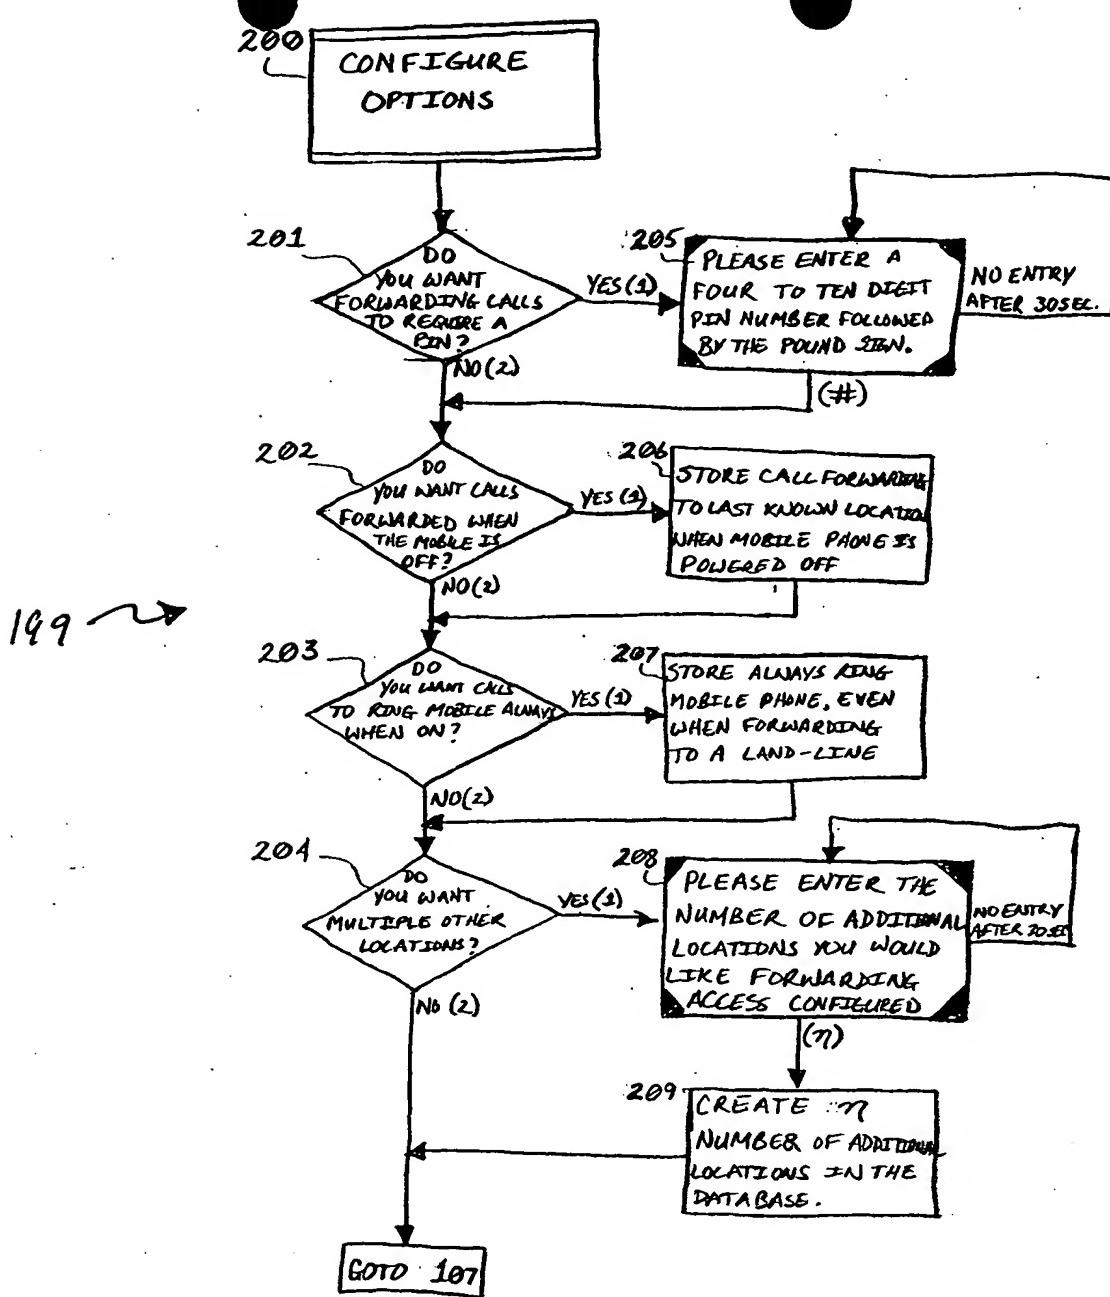


Fig. 13

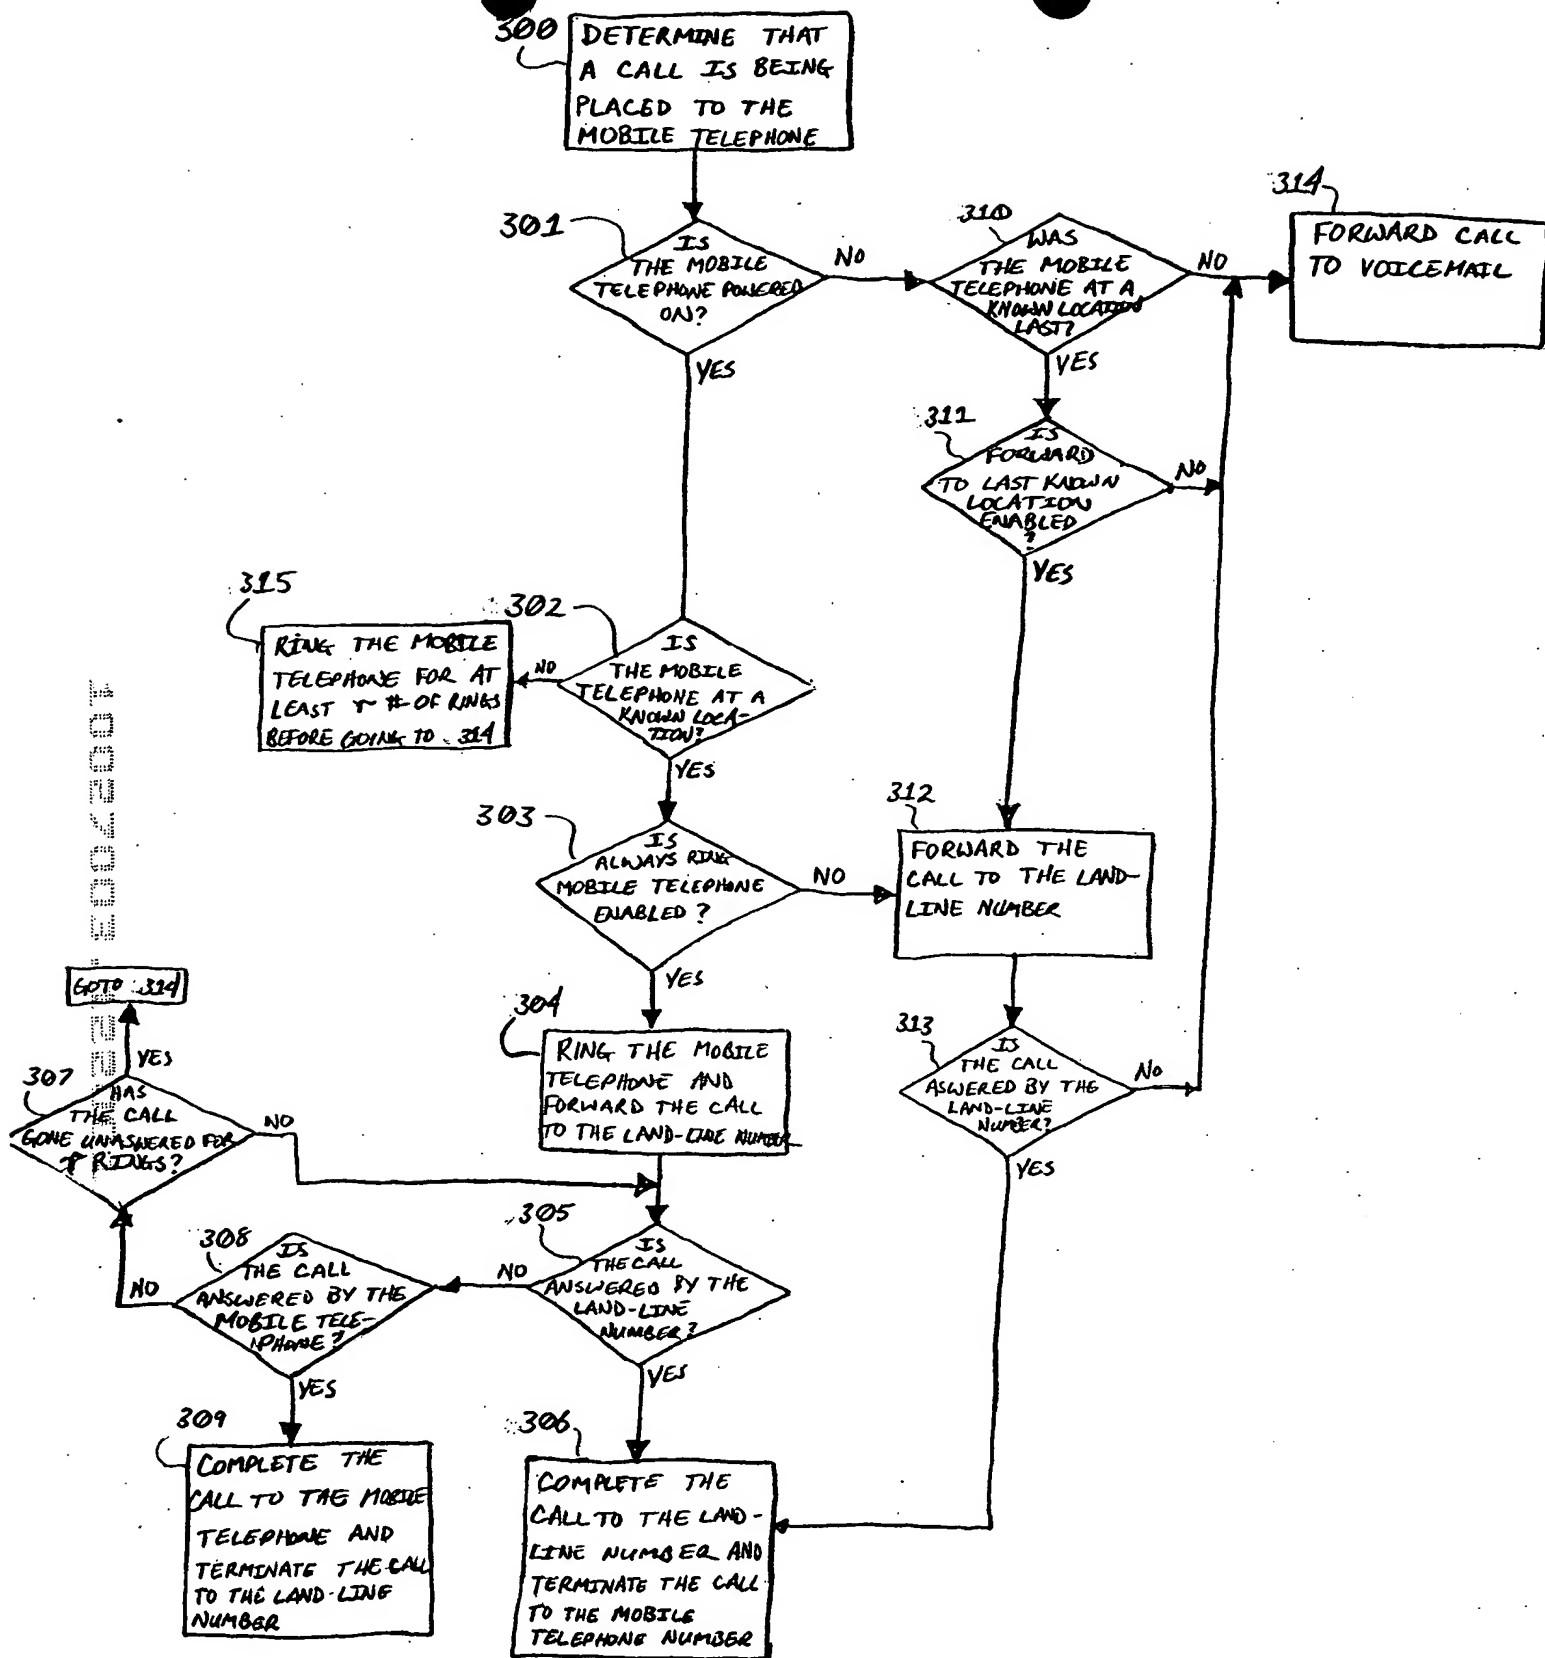


Fig. 14

Fig. 15 is a table showing five locations with their coordinates and land-line numbers. Arrows point from specific fields to labels: '34' points to the 'LOCATION' header, '601' points to the 'LAND-LINE NO.' column, '602' points to the 'LAT.' header, '604' points to the 'LONG.' header, and '606' points to the 'COORDINATES' header.

	LOCATION	COORDINATES LAT. LONG.	LAND-LINE NO.
124	→ PRIMARY RESIDENCE	N40.5139 W74.4779	01529085551234
224	→ SECONDARY RESIDENCE	N40.5631 W74.4772	01529085556789
324	→ PRIMARY OFFICE	N40.5826 W74.5414	01529085553412
424	→ REMOTE OFFICE #1	N50.27011 E11.15121	011490695555123
524	→ REMOTE OFFICE #2		19555511

Fig. 15

Fig. 16 is a table showing five locations with their PIN enabled status, forward when off status, and always ring status. Arrows point from specific fields to labels: '601' points to the 'PIN ENABLED' column, '602' points to the 'FORWARD WHEN OFF' column, and '625' points to the 'ALWAYS RING' column.

	LOCATION	PIN ENABLED	FORWARD WHEN OFF	ALWAYS RING
124	→ PRIMARY RESIDENCE	0	1	1
224	→ SECONDARY RESIDENCE	0	0	0
324	→ PRIMARY OFFICE	1	1	1
424	→ REMOTE OFFICE #1	1	1	1
524	→ REMOTE OFFICE #2	1	1	1

Fig. 16